Denna handling får ej utan vårt medgivande delges annan, kopieras eller eljest obehörigen användas. Överträdelse härvid beivras med stöd av gällande lag.
Diese Zeichnung darf weder ganz noch teilweise ohne unsere ausdrückliche Genehmigung kopiert oder auf andere Weise verveilfältig werden. Zuwiderhandlungen werden gerichtlich verfolgt.
This document must not be copied, either completely or in part, without permission. Any infringement will have legal consequences.
All rights reserved. Alle rechte vorbehalten.

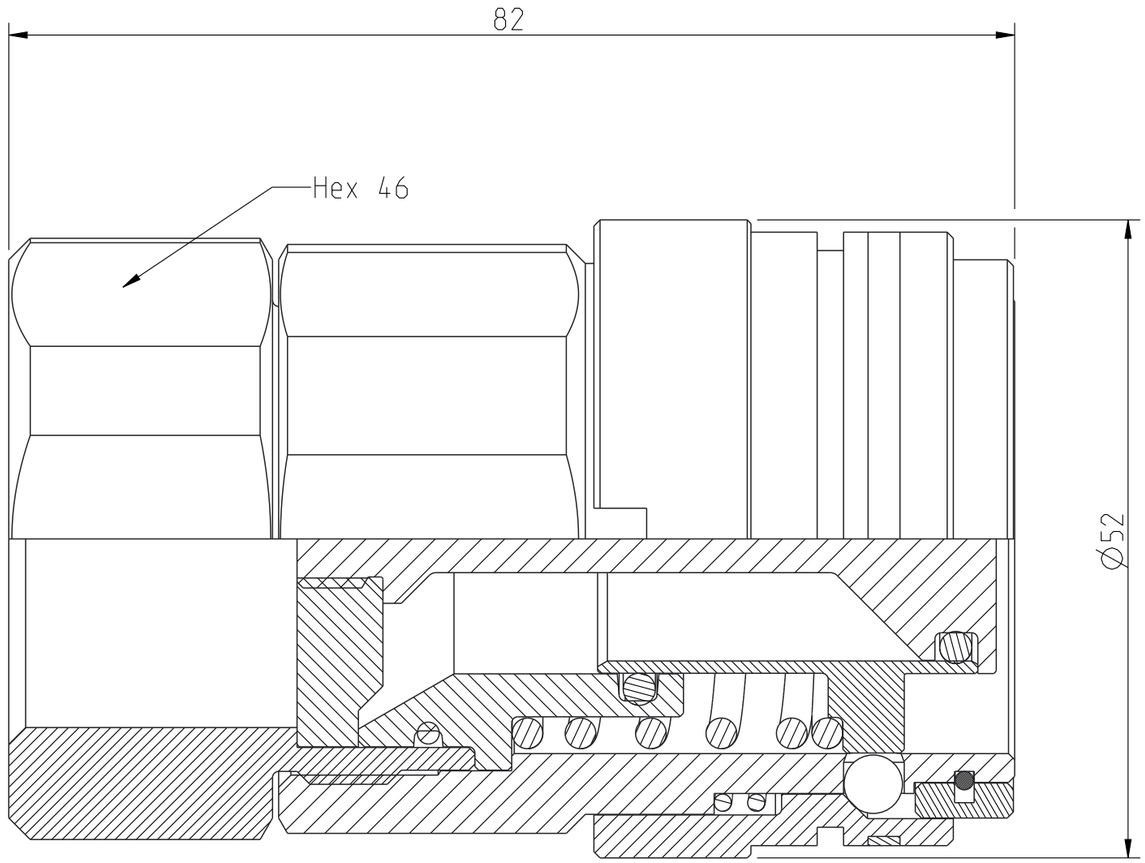

1:1




| Detalj Item | Antal Quant. | Benämning Description | Material Material |
|---|---|---|---|
| 16 | 1 | Wire coil | Acid-proof steel |
| 15 | 1 | Valve sleeve | Acid-proof steel |
| 14 | 1 | Valve seat | Acid-proof steel |
| 13 | 1 | Valve pin | Acid-proof steel |
| 12 | 1 | Stop for valve | Acid-proof steel |
| 11 | 1 | Stop flange | Acid-proof steel |
| 10 | 1 | Spring | Stainless steel |
| 9 | 1 | Spring | Acid-proof steel |
| 8 | 1 | O-ring | EPDM |
| 7 | 1 | O-ring | EPDM |
| 6 | 1 | O-ring | EPDM |
| 5 | 1 | Locking sleeve | Acid proof steel |
| 4 | 1 | Coupling body | Acid-proof steel |
| 3 | 1 | Checking ring | Plastic, Green |
| 2 | 12 | Ball | Stainless steel |
| 1 | 1 | Adaptor | Acid-proof steel |

## Product no: 10_777_1220

| | | |
|---|---|---|
| Max working pressure: | 20 | bar connected |
| | 20 | bar disconnected |
| Min burst pressure: | 80 | bar connected |
| | 80 | bar disconnected |
| Sealing material: | EPDM | |
| Temperatur range: | -20°C - +150 °C | |
| Nominal flow diameter,DN: | 19 | mm |
| Connection | G 1" female | |
| Connection stroke: | 19.8 | mm |

| Skala Scale | Ritad Drawn | Kontr. Checked | Godk. Appr. | ÄM nr. Alt. no. | Dat. Date |
|---|---|---|---|---|---|
| 2:1 | JOJ | – | – | – | 151229 |

Assembly drawing

Ritning nr/Drawing No. 50_777_1220

Utg./Issue AA

A3