Denna handling får ej utan vårt medgivande delges annan, kopieras eller eljest obehörigen användas.
Överträdelse härvid beivras med stöd av gällande lag.
This document must not be copied, either completely or in part, without permission.
Any infringement will have legal consequences.

Diese Zeichnung darf weder ganz noch teilweise ohne unsere ausdrückliche Genehmigung kopiert oder auf andere Weise verveilfältig werden. werden. Zuwiderhandlungen werden gerichtlich verfolgt.

Alla rättigheter förbehålls.
All rigths reserved.
Alle rechte vorbehalten.

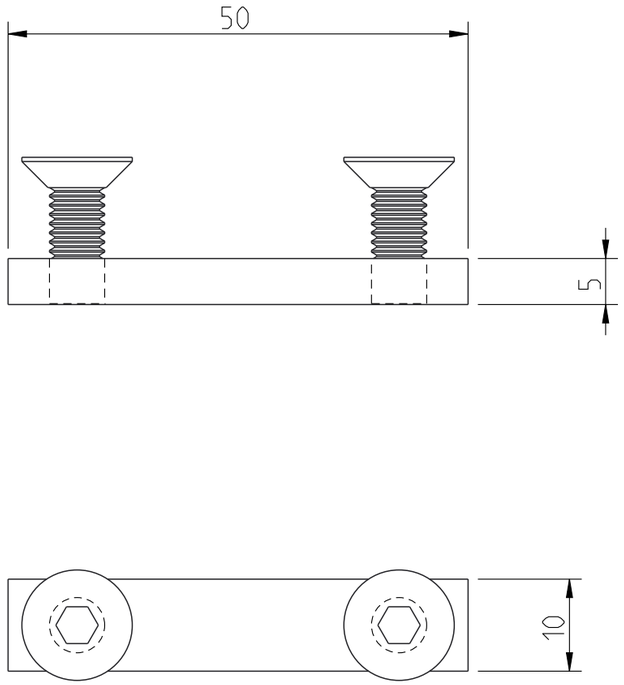

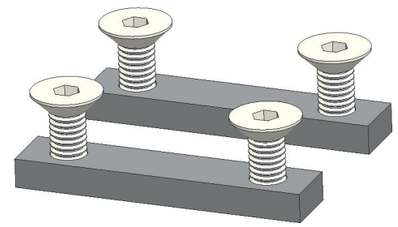

1:1

Tube with thread locking adhesive 1,5 g is supplied with slot nut kit.

Product no: 10_932_4977		
Max working pressure:	bar connected	
	bar disconnected	
Min burst pressure:	bar connected	
	bar disconnected	
Sealing material:		
Temperatur range:	°C -	°C
Nominal flow diameter,DN:	mm	
Connection		
Connection stroke:	mm	

Detalj Item	Antal Quant.	Benämning Description	Material Material
2	2	Slot nut	Steel, Zn 8 silver
1	4	Screw	Steel / FZB

Skala Scale	Ritad Drawn	Kontr. Checked	Godk. Appr.	ÄM nr. Alt. no.	Dat. Date
3:2	CABJOER	–	–	–	150518

Assembly drawing	Ritning nr/Drawing No.	Utg./Issue
	50_932_4977	AA

A3