Denna handling får ej utan vårt medgivande delges annan, kopieras eller eljest obehörigen användas.
Överträdelse härvid beivras med stöd av gällande lag.
This document must not be copied, either completely or in part, without permission.
Any infringement will have legal consequences.

Diese Zeichnung darf weder ganz noch teilweise ohne unsere ausdrückliche Genehmigung kopiert oder auf andere Weise vervielfältig werden. Zuwiderhandlungen werden gerichtlich verfolgt.

Alla rättigheter förbehålls.
All rigths reserved.
Alle rechte vorbehalten.

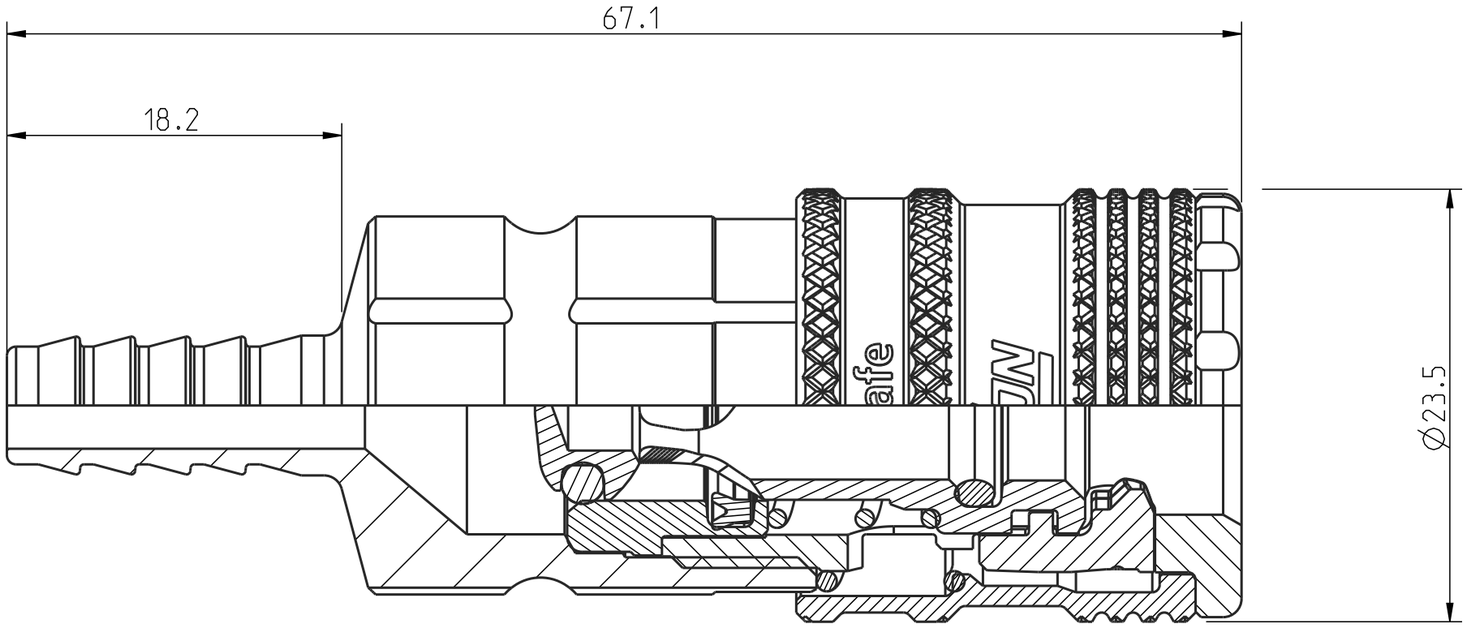

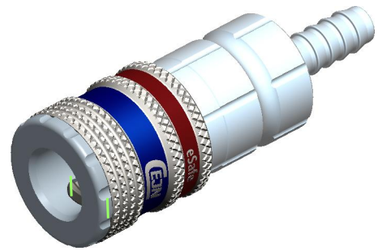

1:1



Product no: 10_310_2002	
DN:	4,7 mm
Connection stroke:	19,5 mm
Max WP connected:	16 bar
Min BP connected:	64 bar
Temperature range:	+100 °C - -20 °C
Connection:	Hose 1/4" 6.3mm
Sealing material:	NBR

Detalj Item	Antal Quant.	Benämning Description	Material Material
11	1	Valve seat	Brass
10	1	Valve	Brass
9	1	Spring	Stainless steel
8	1	Spring	Stainless steel
7	1	O-ring	NBR
6	1	O-ring	NBR
5	1	Locking sleeve	Hard. steel, Zn 8 Silver
4	1	Lip seal	NBR
3	2	Hook	Hard. Steel, Zn-Ni 8 transp.
2	1	Front part	Hard. Steel, Zn 8 Silver
1	1	Back part	Steel, Zn 8 Silver

Skala Scale	Ritad Drawn	Kontr. Checked	Godk. Appr.	ÄM nr. Alt. no.	Dat. Date
3:1	CABLHE	JL	OG	-	140124

Assembly drawing	Ritning nr/Drawing No.	Utg./Issue
	50_310_2002	AA

A3