Denna handling får ej utan vårt medgivande delges annan, kopieras eller eljest obehörigen användas. Diese Zeichnung darf weder ganz noch teilweise ohne unsere ausdrückliche Genehmigung kopiert oder auf andere Weise verwendet werden. Zuwiderhandlungen werden gerichtlich verfolgt. Alla rättigheter förbehålls.
This document must not be copied, either completely or in part, without permission. All rigths reserved.
Any infringement will have legal consequences. Alle rechte vorbehalten.

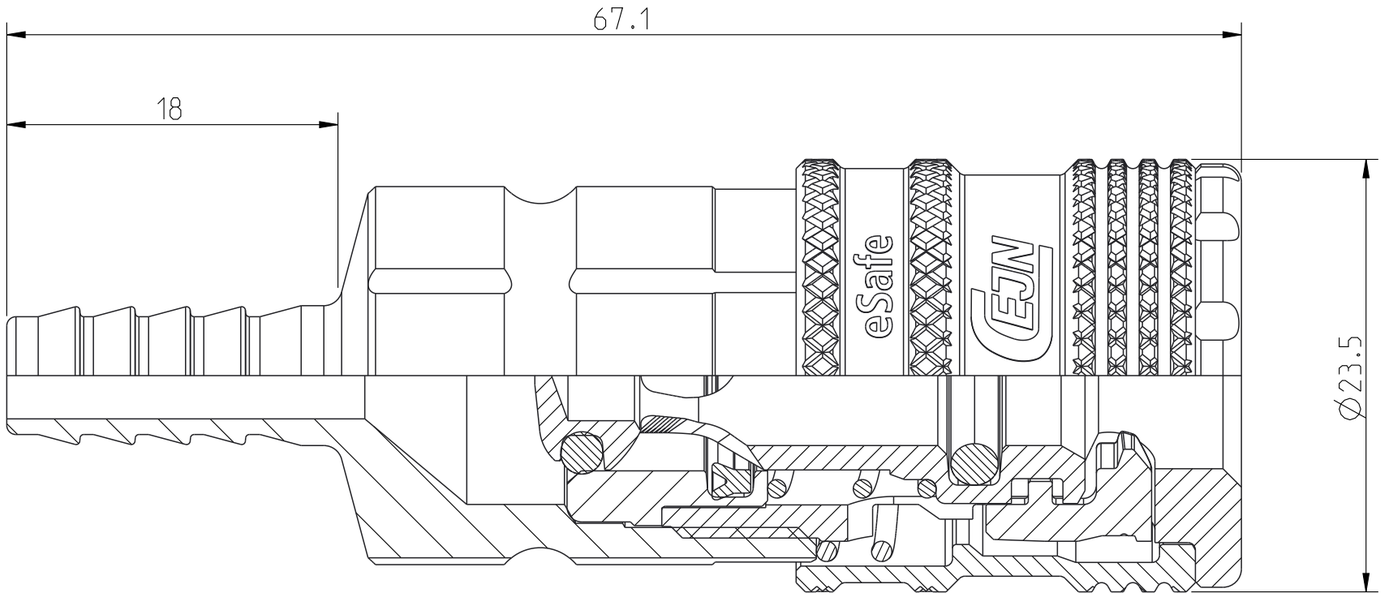

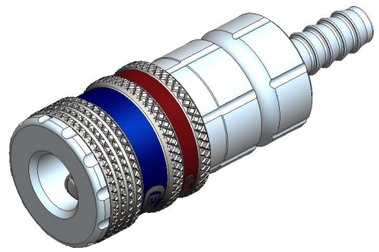

1:1



Connection stroke

Product no: 10_291_2002	
DN:	4.7 mm
Connection stroke:	23.9 mm
Max WP connected:	12 bar
Min BP connected:	48 bar
Temperature range:	+100 °C - -20 °C
Connection:	Hose 1/4" 6.3mm
Sealing material:	NBR

Detalj Item	Antal Quant.	Benämning Description	Material Material
11	1	Valve seat	Brass
10	1	Valve	Brass
9	1	Spring	Stainless steel
8	1	Spring	Stainless steel
7	1	O-ring	NBR
6	1	O-ring	NBR
5	1	Locking sleeve	Hard. steel, Zn 8 Silver
4	1	Lip seal	NBR
3	2	Hook	Hard. Steel, Zn-Ni 8 transp.
2	1	Front part	Hard. Steel Zn 8 silver
1	1	Back part	Steel, Zn 8 Silver

Skala Scale	Ritad Drawn	Kontr. Checked	Godk. Appr.	ÄM nr. Alt. no.	Dat. Date
3:1	CABPGU	JOOL	OG	11336	15-12-30

Assembly drawing	Ritning nr/Drawing No.	Utg./Issue
	50_291_2002	AA

A3